Montageempfehlung

Recommended installation

Taktile Handlaufbeschriftung aus Kunststoff/Aluminium/Folie

Tactile hand rail sign made of plastic/aluminium/foil

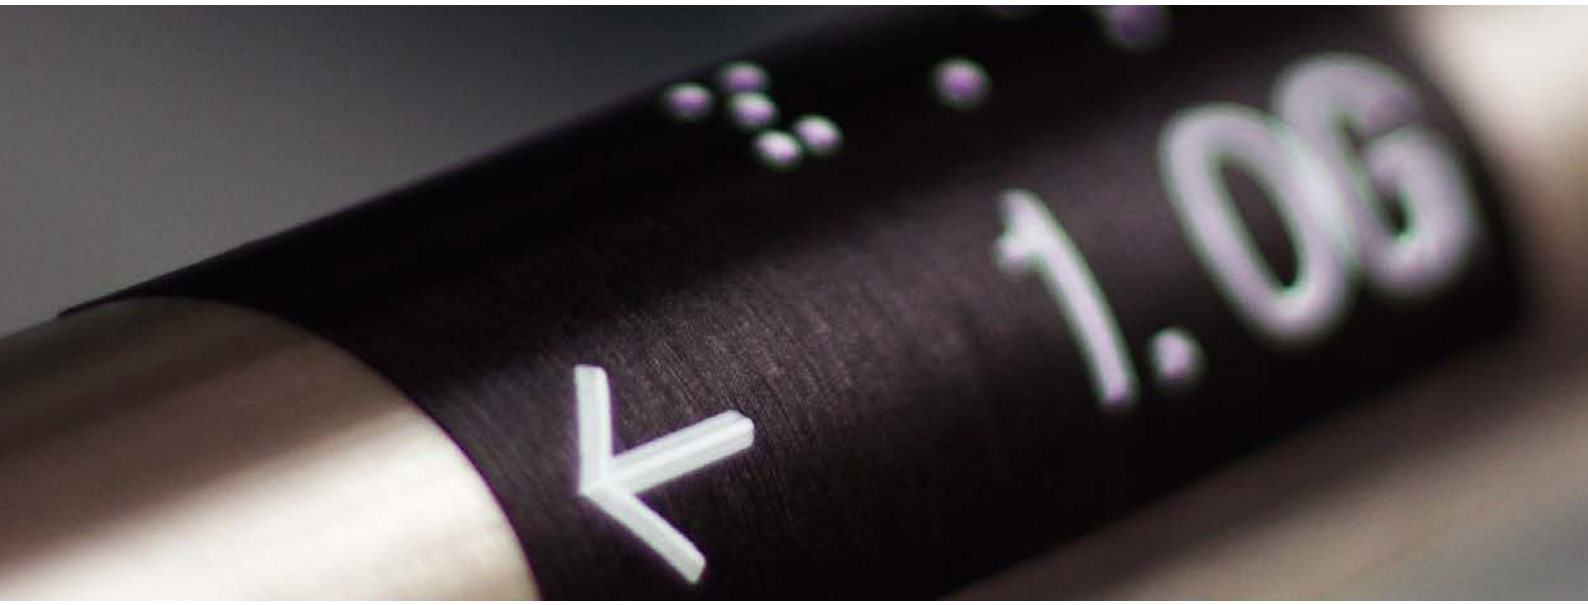

Stand: oe/11-2023

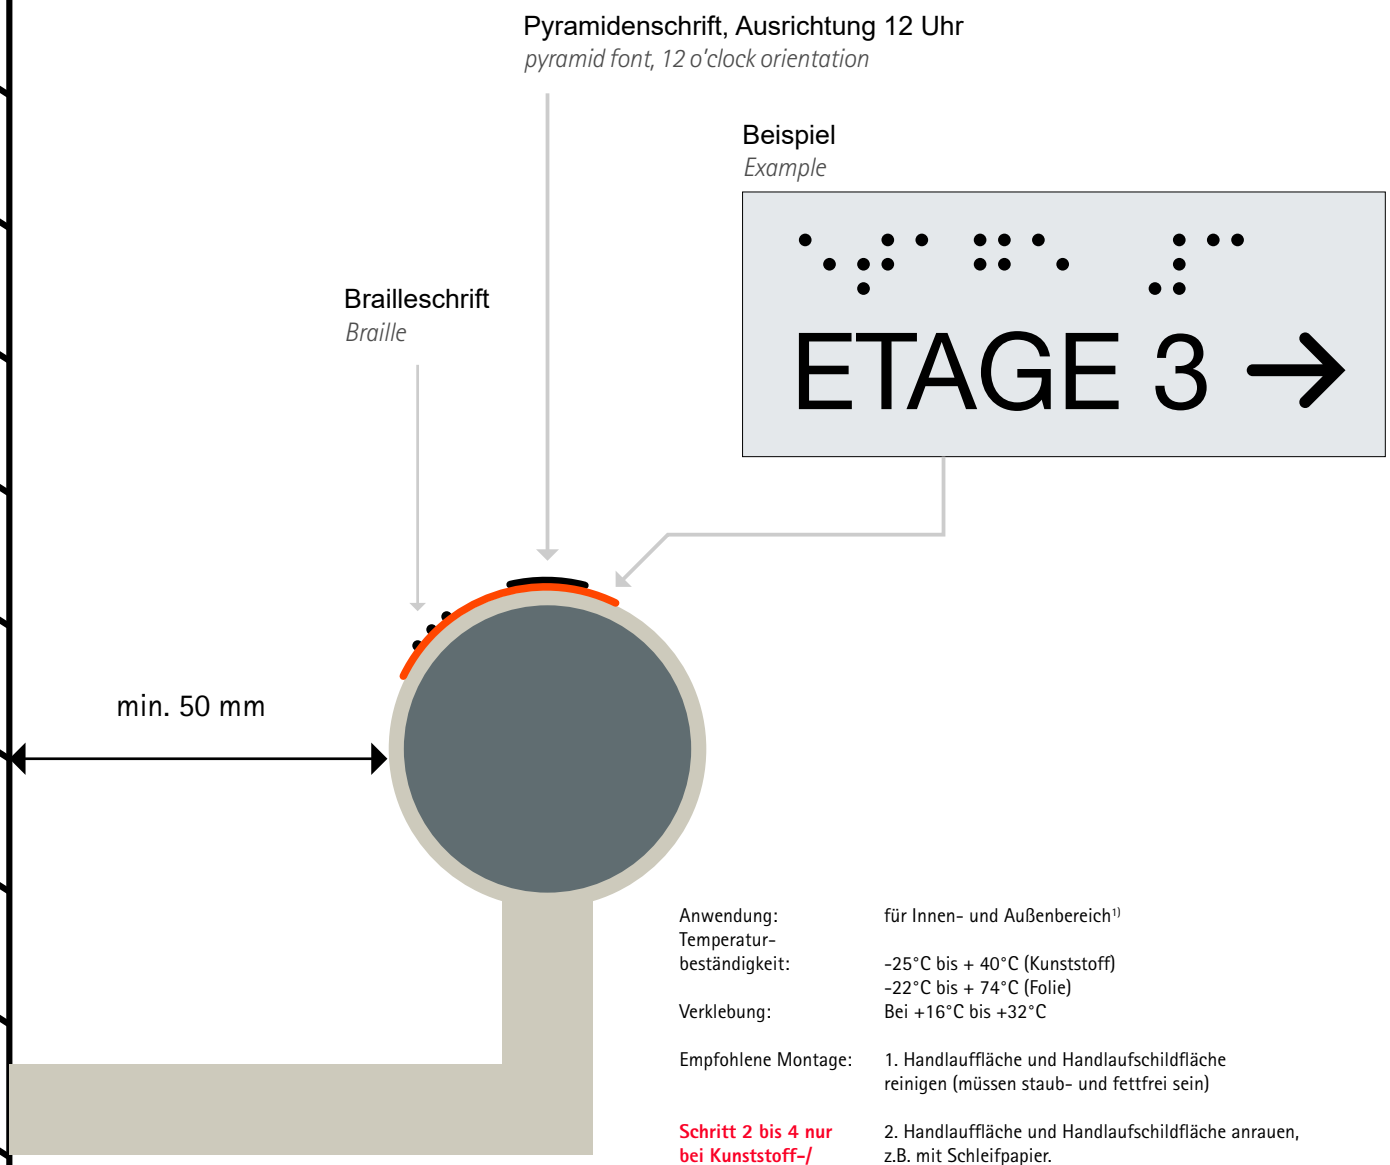

Anwendung:	für Innen- und Außenbereich[1)]
Temperatur-beständigkeit:	-25°C bis + 40°C (Kunststoff) -22°C bis + 74°C (Folie)
Verklebung:	Bei +16°C bis +32°C
Empfohlene Montage:	1. Handlauffläche und Handlaufschildfläche reinigen (müssen staub- und fettfrei sein)
Schritt 2 bis 4 nur bei Kunststoff-/ Aluminiumschild	2. Handlauffläche und Handlaufschildfläche anrauen, z.B. mit Schleifpapier. 3. Montagekleber auf die Handlauffläche aufbringen und Handlaufschild mit hohem Druck anpressen. 4. Handlaufschild für die Zeit des Aushärtens fixieren, z.B. mit Kabelbinder oder Klebeband. Montagekleber benötigen ca. 24h zum Aushärten!

Information Folienschild:
Auf unbehandeltem Metall, Polyethylen und Polypropylen-Oberflächen nicht empfohlen.
Kantenversiegelung WIRD EMPFOHLEN.

Verarbeitungshinweise für selbstklebende Produkte können Sie bei uns anfordern.
Please ask us for applications tips for self-adhesive products.

HINWEIS Folienschild:
Die Folie/Druck muss zum Verkleben mit den Handflächen leicht angewärmt und langsam um den Handlauf gebogen werden. Durchmesser des Handlaufes darf nicht kleiner als 30 mm sein.

NOTE Foil label:
The film/print must be slightly warmed up with the palms of your hands and slowly bent around the handrail for bonding. The diameter of the handrail must not be less than 30 mm.

Application:	*for indoor and outdoor[1)] use*
Service temperature range:	*-25°C bis + 40°C (plastic)* *-22°C bis + 74°C (foil)*
Application temperature range	*+16°C to +32°C*
Recommended installtion:	*1. Clean hand rail part and bade side of hand rail sign (both have to be free of dust and from grease)*
Step 2 - 4 only for plastic/aluminium hand rail sign	*2. Roughen hand rail part and back sided of hand rail sign using sand paper or equal.* *3. Apply mounting adhesive to hand rail part and press handrail sign on with high pressure.* *4. Fix hand rail sign for curing time using cable tie or adhesive tape or equal.* *Mounting adhesive needs ca. 24h for curing.*

Information foil hand rail sign: Not recommended for application to untreated metal, polyethylene and polypropylene surfaces. Recommended edge sealing

1) Nicht geeignet für Folienhandlaufschild
Not for foil hand rail sign

Stand: oe/11-2023